


# CCR Stacking Kits

## CCR Stacking Kits

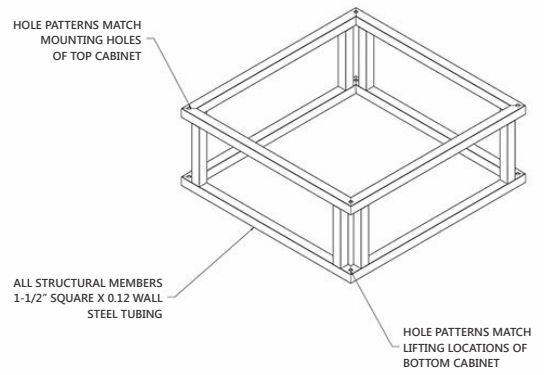


### CCR Stacking Kits

ADB Safegate's 4-30 kW regulators can be stacked to minimize the floor space required in a vault. When stacking regulators, the upper regulator must be the same frame size or smaller than the bottom regulator. To stack regulators, order the appropriate ADB Safegate stacking kit.


The part numbers for stacking kits are 94A0475-XX. The first X is for the bottom CCR and the second X is for the top CCR. The frame sizes are L, M, and S, and there are six allowable combinations: LL, LM, LS, MM, MS, and SS. Small (S) is for CCRs that are 33" x 24" x 25" (H x W x D). Medium (M) is for CCRs that are 36" x 29" x 30". Large (L) is for CCRs that are 40" x 33" x 34". The kit raises the top CCR up 13 inches to allow for proper airflow. To ensure easy access to the controls on the top regulator, the CCRs can only be stacked two high.

If a smaller CCR is mounted on top of a larger CCR, it is not centered above the lower CCR, but off-set to the one side or the other as shown in Figure 2. For information on CCR dimensions and weights, see data sheets 3013 (ferro) and 2052 (thyristor).

LARGE CABINET ON LARGE CABINET

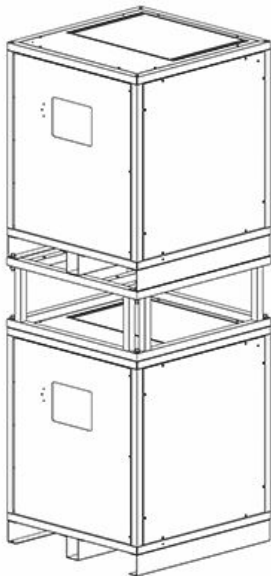

MEDIUM CABINET ON LARGE CABINET

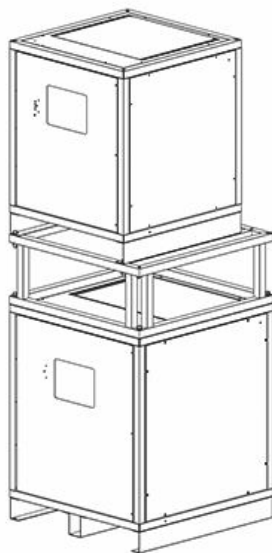

SMALL CABINET ON LARGE CABINET

